


## Congratulations on purchasing an EDISION piccollino S2+T2/C

Please note that this information is valid at the time of publication.

Current information and detailed user manuals can be found on the Internet at: [www.edision.gr](http://www.edision.gr)

## 1 Unpacking

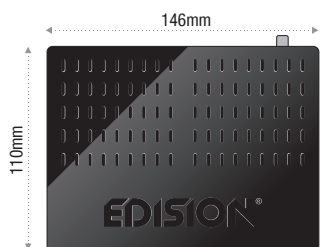

Remote control with 2 AAA batteries



Documentation



Service note

Please contact your EDISION specialist dealer for any further support and service.

### Receiver piccollino S2+T2/C

**Notes:** The front is factory fitted with a protective foil which can be removed easily and with caution. (Protective foil only for devices with display)

The scope of delivery may also include parts not listed here


### Front Panel

- ① POWER button: Activates/Deactivates the device
- ② CH- / CH+ buttons: for moving in the program lists
- ③ Infrared sensor for the reception of remote control commands
- ④ Display LED, displays current information
- ⑤ Card reader




### Back Panel

- ⑥ ANT IN: Input for connecting to terrestrial or cable signal from the antenna
- ⑦ LNB IN: Connection for the coaxial cable to the signal from the satellite system
- ⑧ ETHERNET: Ethernet port RJ45 10/100 Mbps
- ⑨ S/PDIF: Audio interface for amplifier/audio console
- ⑩ HD OUT: Connection to an HDTV quality TV
- ⑪ RS 232: For connecting to a PC, for receiver software update.
- ⑫ AV OUT: For broadcasting video and sound signals
- ⑬ IR IN: Infrared connection port
- ⑭ Connection for an adapter (DC 12V/1,5A)

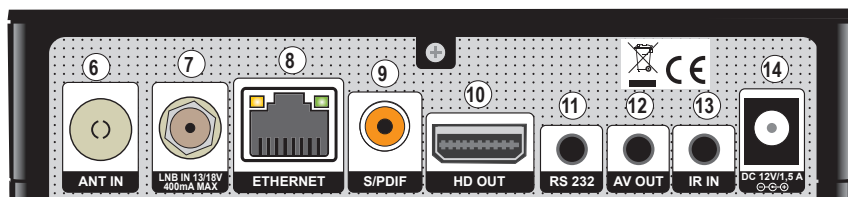

### Subpage


- ⑮ USB / 2 x USB: Connection for USB storage devices

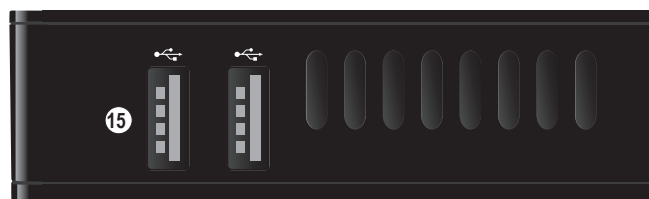

## 2 Connecting and switching on

**Note:** For interference-free satellite TV reception, a specialist technician must calibrate your satellite TV system with a digital TV level meter

- Connect the receiver using HDMI cable via the HD output port to your TV's HD input port
- Now connect the receiver to the satellite antenna cable via the ANT IN or LNB IN input.
- Insert the batteries into the remote control. Notes on the remote control can be found on the back of these instructions.
- Connect the receiver to the power supply.
- The receiver starts with the BOOT process and is operational within a short time

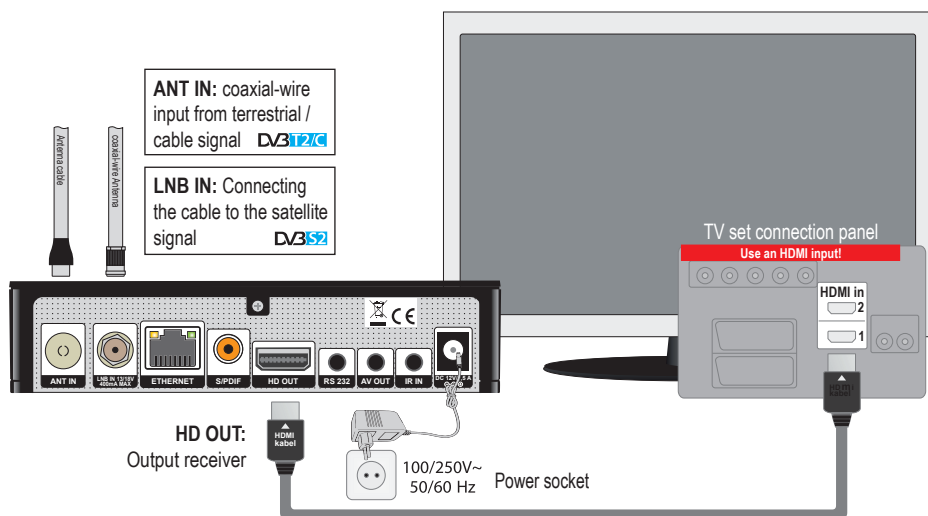

















For information about EDISION Hardware or Software matters, please contact [support@edision.gr](mailto:support@edision.gr)










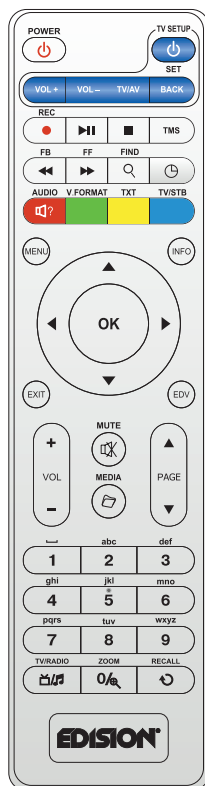

The CE certificate of the product is available on our webpage, by visiting this link: <https://www.edision.gr/en/support>

## 3 Remote Control EDI-RCU 2 Learn Slim

EDI-RCU 2 Learn Slim is compatible with EDISION STB's\*, plus it is pre-programmed with 5 basic functions for SAMSUNG & LG\*\* tv sets. Alternatively, you can program its 5 programmable buttons to any 5 functions of your TV.

-  On/Off button
-  Mute On/Off
-  Starts recording manually
-  Start playing the TimeShift function and / or a Recording. Back to normal recording speed. Pauses playback
-  Finishes TimeShift, a recording or a playback
-  Scrolls listings per page backward  
Fast Possibility backwards
-  Scrolls listings per page forward.  
Fast-forward capability
-  Displays a file list
-  Show bar TimeShift
-  Displays a file-list
-  Allows you to set the time at which the Receiver autom. switches to standby mode
-  Calls up the Audio menu
-  Changes the display TV standard
-  Calls up the Subtitle/Teletext menu
-  Switching between TV and Receiver




-  Displays the main menu
-  Displays the information bar
-  With the arrow keys you can scroll in the lists up and down, left and right or regulate the volume. With the OK-key you confirm your menu-entry or activate the channel-list.
-  Exits a Menu/Dialogue window
-  Selection of the electronic program guide EDIVISION
-  Scrolls up (+) or down (-) change the volume
-  Scrolls up (+) or down (-) in lists of channel lists
-  Selection of TV/Radio program. Input of numbers or letters in the menus
-  Toggles between TV and Radio mode
-  Entering the number 0 / enlarges the image
-  Returns to the previous program

## MANUAL INSTRUCTION FOR LEARN EDI-RCU 2 Learn Slim

Your set-top-box remote control has 5 learning-function keys, in the up right hand side TV keypad panel area. Each one can be used accordingly as the following example:

1. Turning your TV set ON/OFF **[SET]**
2. Increasing/decreasing volume **[VOL+ , VOL-]**
3. Switching between TV/AV mode **[TV/AV]**
4. Command confirmation **[BACK or EXIT]**

The other keys are for the control of the EDISION set-top-box.

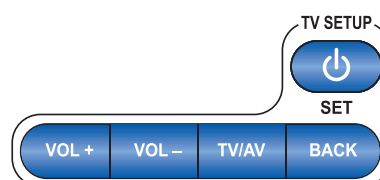

### SET UP FOR LEARNING FUNCTION

- Press **[SET]** key in the up right hand side TV keypad panel area continuously for 5 Sec. until the LED lights up and keep lighting, then release the key. This means the remote control is in the learning mode.
- Within 10 seconds, press the key in the original TV IR control, which needs to be learned, for example the **[POWER]** key, then the red LED is flashing. It means this button is ready to receive the learning signal.
- Aim the emission port of the original TV remote control at the front at the emission port at the front of your set-top box remote control (distance between these two ports has to be about 2~3 CM).
- Then press the key which is to be learned in your original TV remote control, for example the **[POWER]** key of your original TV remote control continuously for 3 seconds. If the red LED flashes quickly for three times and keep lighting, it means the set-top box remote control has succeeded in receiving the signal and you have completed the learning procedure of ON/OFF **[TV POWER]** key.
- Then release the **[POWER]** key of your original TV remote control.

If the copying procedure fails, the red LED will blink and stay OFF. In this case please repeat the procedure.

For the next programmable function, please repeat steps 1 to 2:

- Switching between TV/AV mode **[TV/AV]**
- Increasing/decreasing volume **[VOL+ , VOL-]**
- Command confirmation **[BACK or EXIT]**

Now you can operate your TV with the 5 programmed by you keys of your set-top box remote control.

During the operation, the LED will flash to indicate that the signal is transmitted!

\* For EDISION STB compatibility, please visit our webpage

\*\*LG & SAMSUNG are brand names that belong solely to LG Electronics Inc. and Samsung Electronics Co., Ltd respectively. Any brand name reference in this text is only for informational purposes towards the consumer that is interested in the product.

Visit us on:  
**www.edision.gr**